


PREP YOUR BUSINESS and EQUIPMENT ROOM

Your guide to a hassle-free installation




AquaFrixio
Hydro Massage System

Having your **power ready** is
critical for the date of installation.

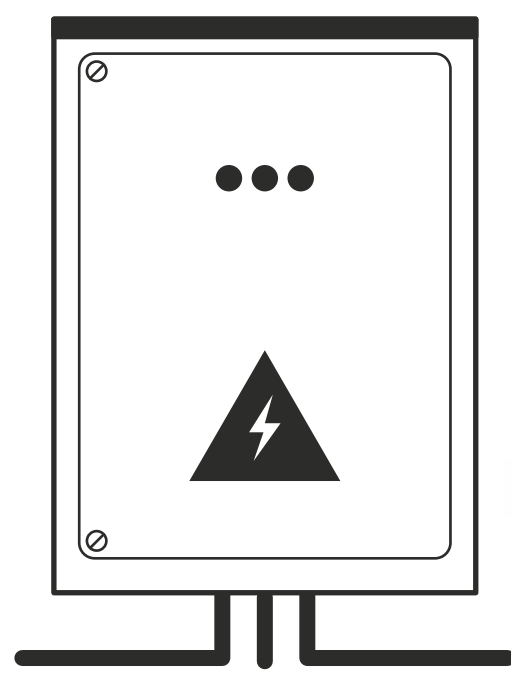


Breaker
panel

220 Volt
20 Amp

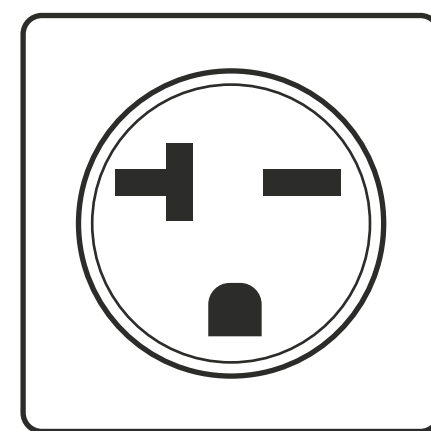


Prep your **T-Max** system before installation!

- 1** Determine how many equipment rooms need to be prepped.

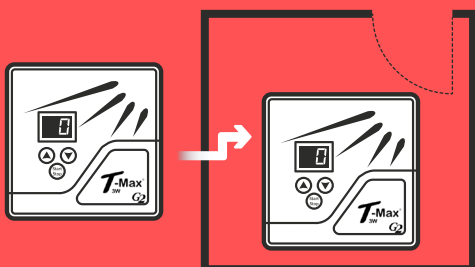

For 2 or less rooms use a front desk to room connection.

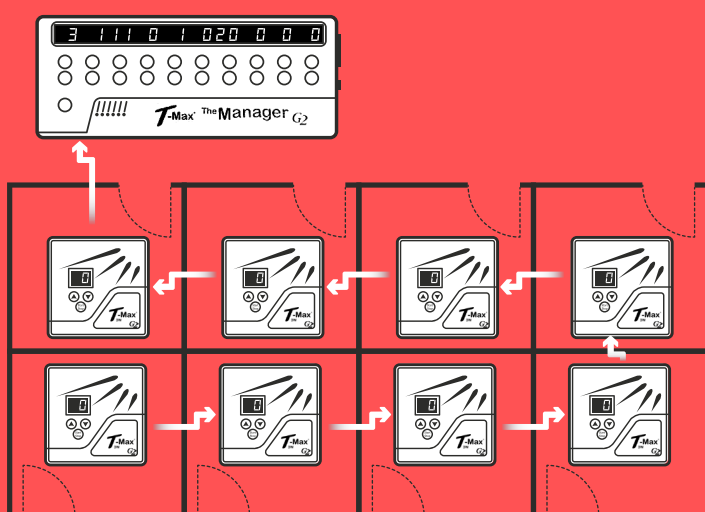


For more than 2 rooms use a daisy chain connection.

- 2** Purchase the proper materials.

4-wire flat
phone cable

RJ22
Modular Jack

Purchase T-Max cable from ProSun or get 4-wire flat phone cable with RJ22 modular jack.

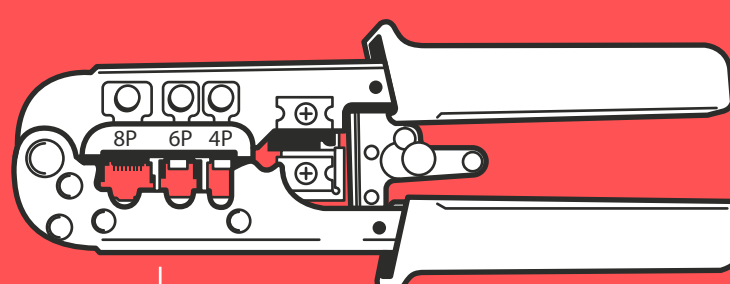


Crimp tool

If getting your own cable get the RJ22 crimp tool. Make sure you put the ends in a straight wire pattern (where the wires line up the same on each end where the jack is crimped on).

! Bad crimp = faulty T-Max connections

- 3** Run the cable connections.

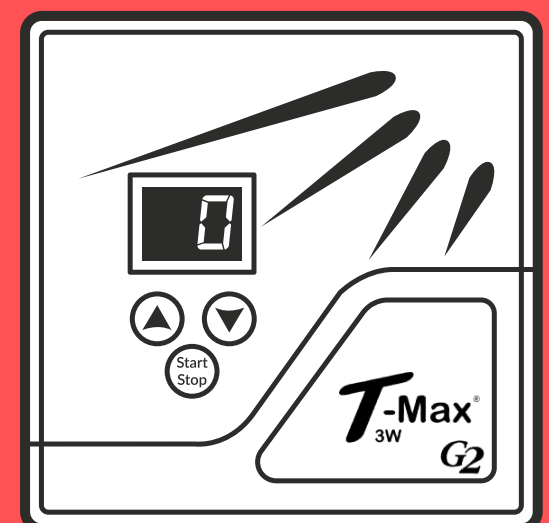

All T-Max cables must be ready and in place prior to installation.




For single room : Start at front counter and run to the individual rooms, clearly labeling the room #'s.

For daisy chain : Start at front desk to room 1, room 1 to room 2, room 2 to room 3, room 3 to room 4 etc.



! Room configuration may differ based on room #'s or location. Cables should start at front counter and make a logical path to the last room in the chain.

Let's get your *equipment room*

READY!

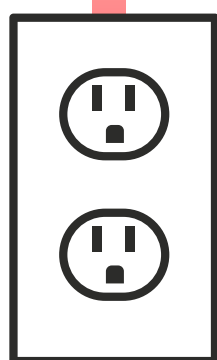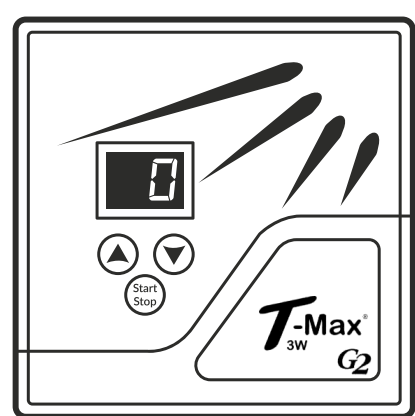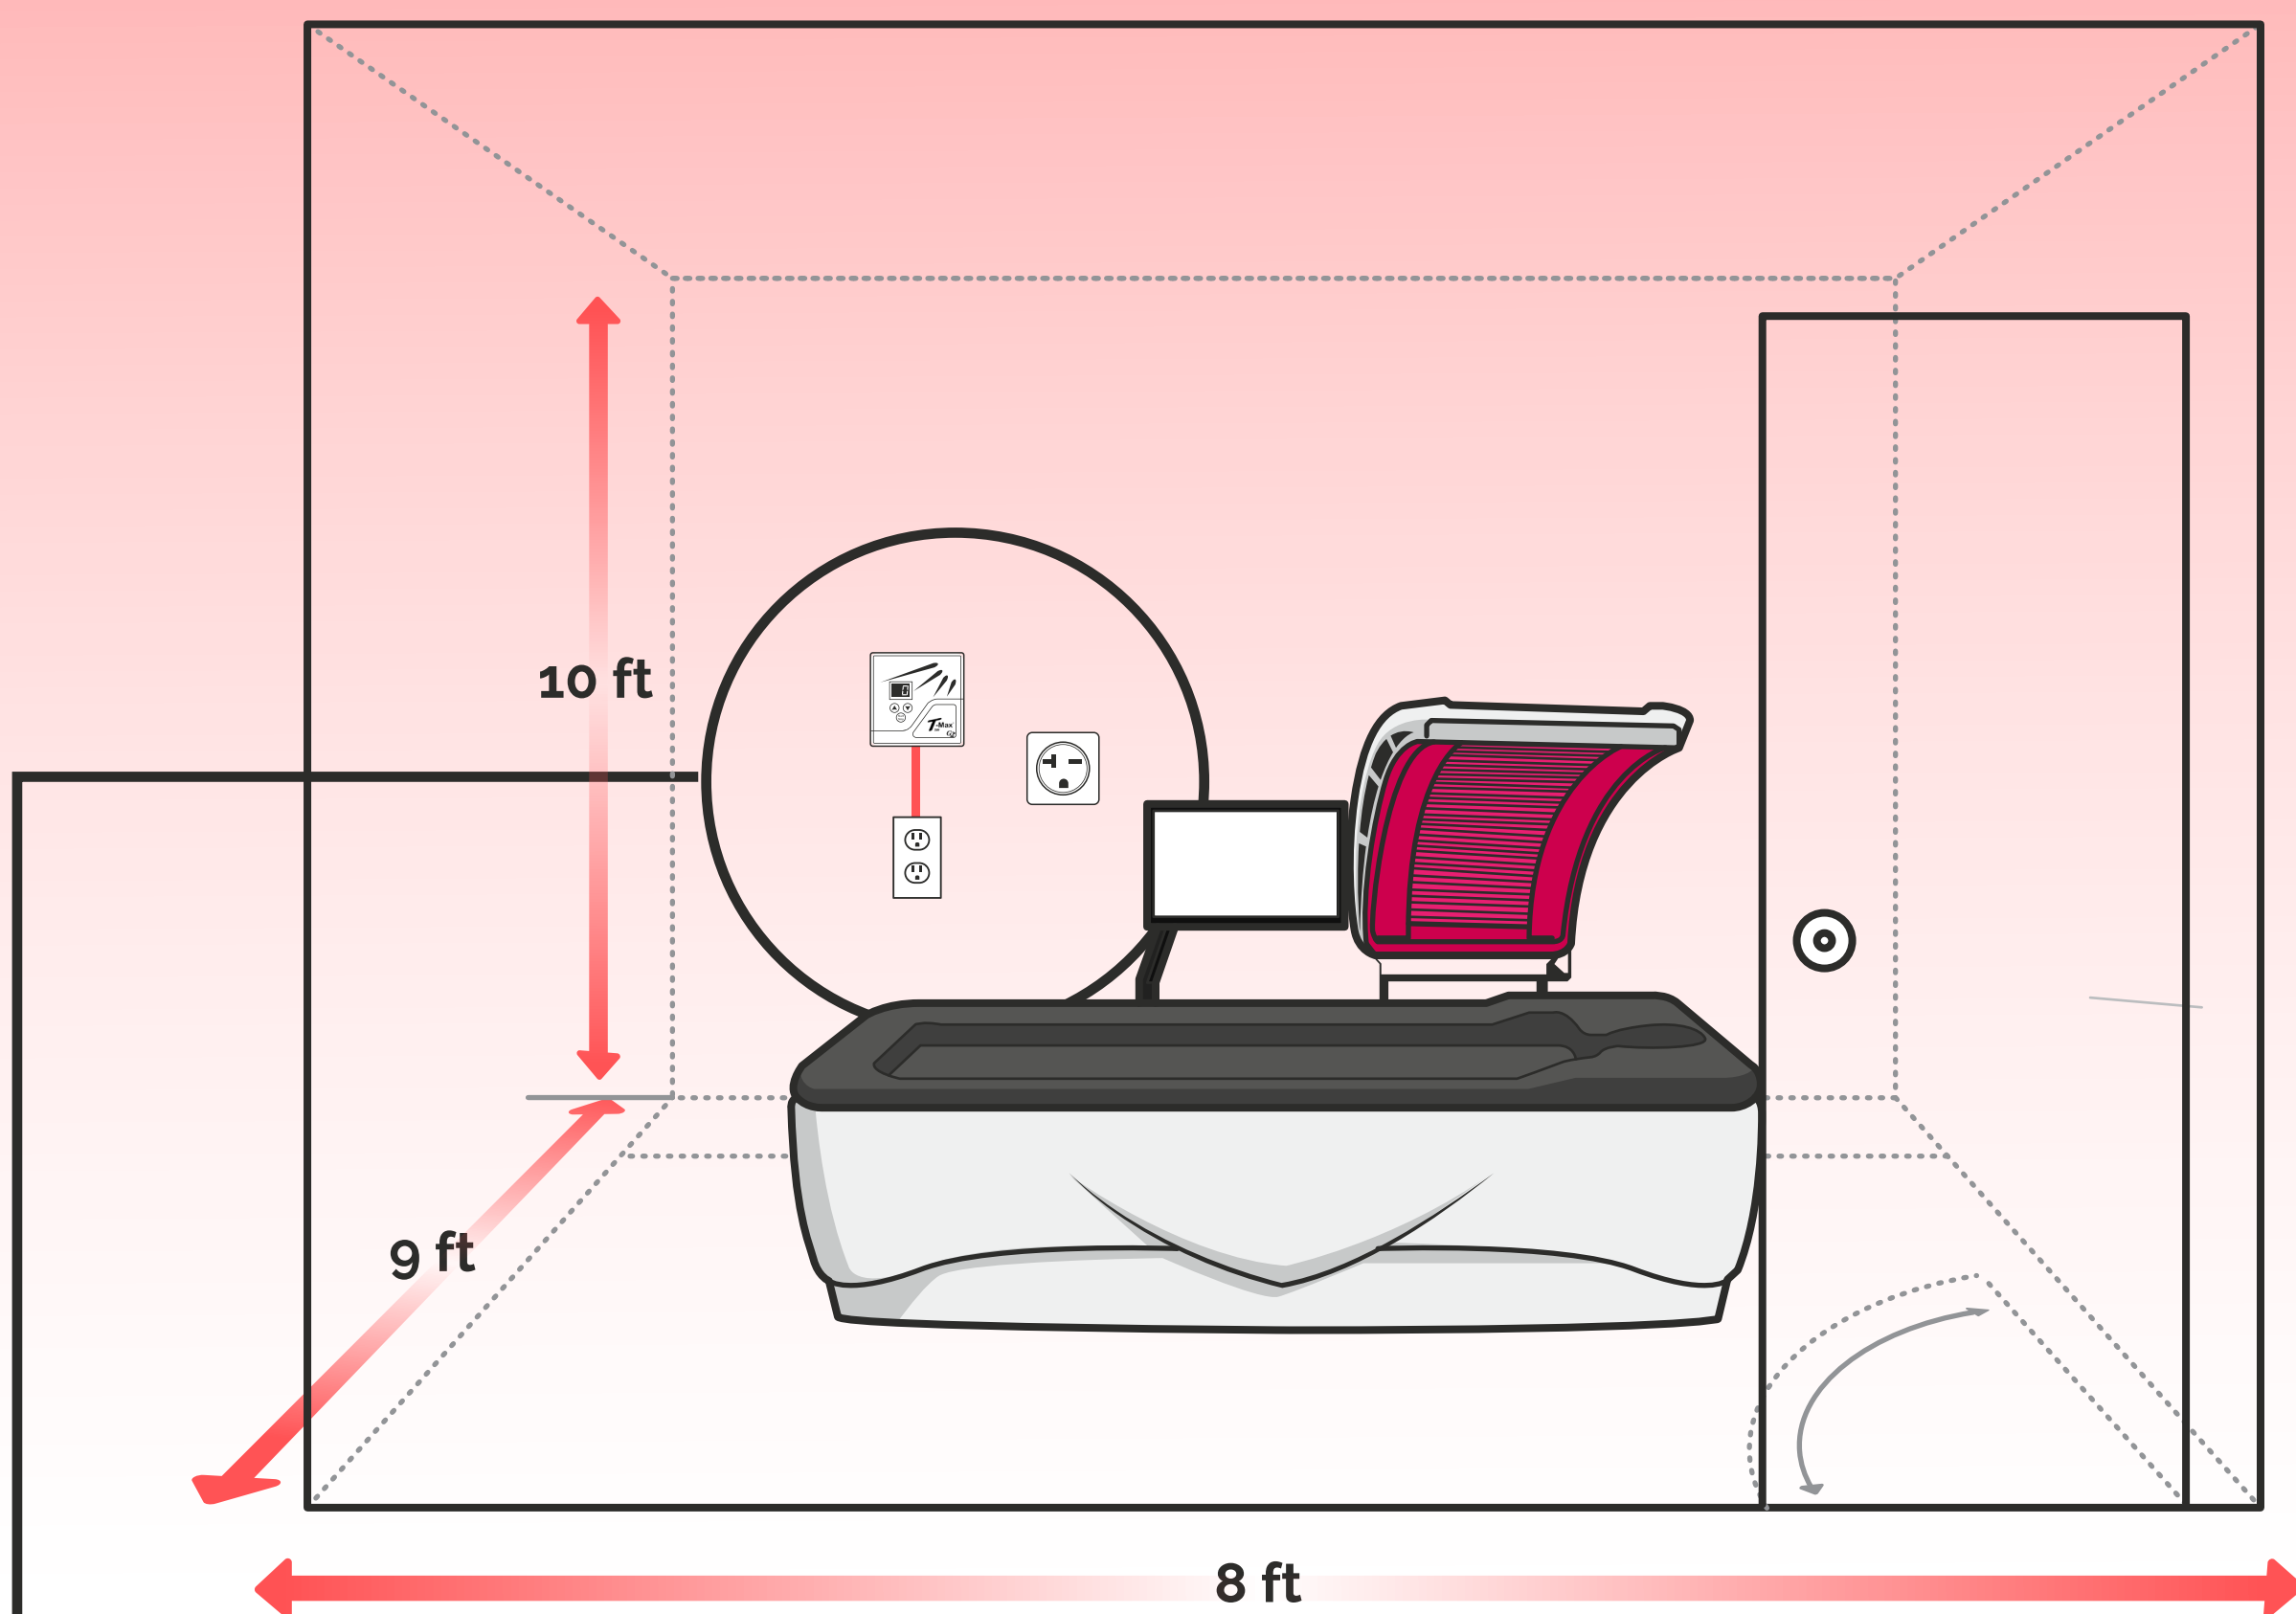

220 Volt
20 Amp

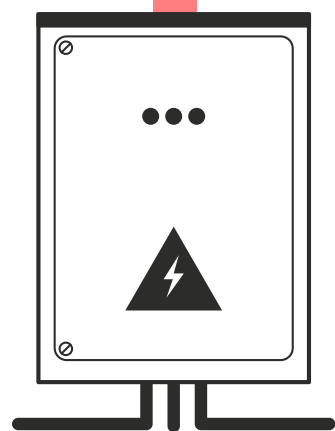

T-Max can be located behind unit as the quickstart will have users operating bed from the display in the bed.

Disclaimer: All information provided is a suggestion for best layout but you must verify with your local electrical codes for approval.



AquaFrixio (Optional FSR Red Light Canopy) 15 mins

- ◉ Recommended room size: 9ft x 10ft
- ◉ Electrical Rating: 220V ~12A 60Hz
- ◉ Lamps: 24 x 25W Red Light
- ◉ Power Requirements: 20 Amp Dedicated Line
- ◉ Water Requirements: 40 Gallons Distilled Water
- ◉ Display: 21" Touch Screen
- ◉ Session Time: 15 Minutes
- ◉ T-Max Compatible: Standard
- ◉ T-Max Integrated: (110V required) Standard

Disclaimer: A 0.50 KVA BUCKBOOSTER IS REQUIRED IF VOLTAGE IS BELOW 208V OR ABOVE 245V.

Disclaimer: UNIT REQUIRES DISTILLED WATER. USE OF NON-DISTILLED WATER VOIDS WARRANTY. DISTILLED WATER NOT INCLUDED.

Contact Us

☎ 440.937.7775

✉ Info@suntansupply.org